


Analogue Pointer - Type Frequency Meter

ZQ 48
ZQ 72
ZQ 96
ZQ 144

Data Sheet

Analogue Pointer -
Type Frequency Meters

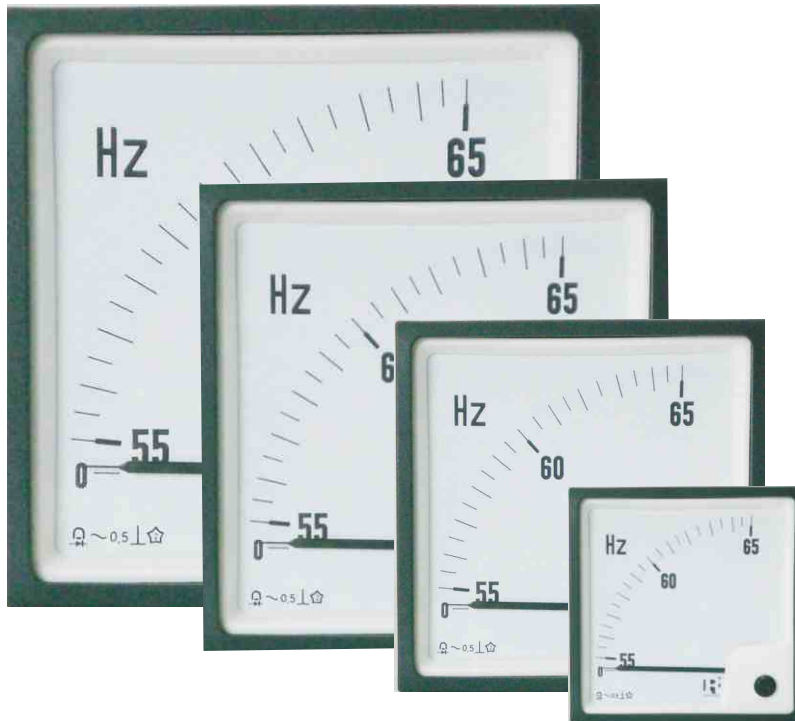

Application

The pointer type frequency meters, ZQ 48/72 / 96/144 housed in moulded polycarbonate cases are suitable for the measurement of frequencies in the range of 45 to 450 Hz.

For maximum accuracy, the essential measuring range is obtained by suppressing the unwanted frequency span.

These instruments offer several advantages in switchboard and Generating Set Panels. Number of meters can be mounted in a single Cut out (Mosaic mounting). Front glass, Bezel & Dial can be easily replaced.

Features

- Linear Scale
- Glass filled polycarbonate Lousing.
- Knife edge pointer.
- Easily replicable glass and bezel.
- Easy installation with swivel screws.

Functional Principle

Frequencies are measured with a built in electronic transducer & moving coil indicator. Moving coil movement has pivots of very high hardness. Movement is suspended between spring loaded sapphire jewels. Movement is properly shielded & critically damped by eddy currents induced in coil former.

Specifications

Mechanical Data

Case details	Moulded square case suitable for mounting in Control / Switchgear panels. Machinery consoles.
Case material	Glass filled polycarbonate, flame retardant and drip proof as per UL 94 V-0.
Front facia	Glass
Colour of bezel	Black
Position of use	Vertical
Panel fixing	Swivel screws
Mounting	Stackable in a single cutout
Panel thickness	≤ 25 mm
Terminals	Hexagon studs, M4 screws And wire clamps E3

Electrical Data

Measured quantity	Frequency
Input quantity	Alternating voltage in sinewaveform
Overload capacity	(acc. to IS: 1248 / IEC 51)
Continuously	1.2 times rated voltage
Short duration	2 times rated voltage, 5 sec
Enclosure code	IP 52 case
(IEC 529)	IP 00 for terminals without back cover IP 20 for terminals with back cover
Insulation class	Group A according to VDE 0110
Rated insulation voltage	660V
Proof voltage	2KV
Installation category	300V CAT III
Insulation resistance	> 50 Mohm at 500 V d.c
Power consumption	≤ 7VA

Standard Measuring Ranges

Frequency Range	45.....50.....55 Hz 45.....55.....65 Hz 55.....60.....65 Hz 360...400...440 Hz 380...400...420 Hz
Rated input voltage	57.7 V 63.5V 100 V 110 V 115 V 120 V 127 V 208 V 220 V 230 V 240 V 289 V 380 V 400 V 415 V 440 V 440 V 500 V

Scale and Pointer

Pointer	Knife - edge pointer
Pointer deflection	0...90
Scale characteristics	linear *
Scale Division	Coarse - fine
Scale length	ZQ 48 ZQ 72 ZQ 96 ZQ 144 41mm 63 mm 97mm 146 mm

Accuracy at Reference Conditions

Accuracy class	0.5 according to IS: 1248 (IEC 51/ DIN EN 60051)
----------------	---

Reference conditions

Ambient temperature	23°C ± 2°C
Position of use	Nominal position ± 1°
Input	Rated Value of measured quantity
Other conditions	IS : 1248 (IEC 51/ DIN EN 60051)
Preheating time	≥ 3 min

Nominal range of use

Ambient temperature	0...50°C
Position of use	Nominal position ± 5°
External magnetic field	0.5 mT
Voltage	Rated Voltage ± 15 %

Environmental Conditions

Climatic suitability	: Climate category II as per IS : 1248 (climatic class 3 according to VDE/VDI 3540)
Operating temperature	: - 10... + 55°C
Storage temperature	: - 25... + 65°C
Relative humidity	: ≤ 75% annual average, non-condensing
Shock resistance	: 15g, 11ms
Vibration resistance	: 10-55-10 Hz / 0.15mm 1.5 g at about 50 Hz.
Pollution degree	: 2

Applicable Standards

Nominal case and cutout dimensions for indicating Electrical instruments	: IS 2419 DIN 43700
Scale and pointer for electrical measuring instruments	: IS 1248 DIN 43802
Connections and Terminal markings for panel meters	: IS 1248 DIN 43807
Terminal bolts / leads.	: DIN 46200/46282
Clamp straps for connections	: DIN 46282
Safety requirements and protective measures for Electrical indicating instruments and their accessories.	: IS 9249 DIN 40050/8-70, VDE 0110/ 11-72 VDE 0410/ 10-76 IEC 529, IEC 1010
Performance specifications for direct acting indicating analogue electrical measuring instruments and their accessories	: IS 1248 IEC51/DINEN60051 DIN 43701
Environmental conditions	: IS 1248 IS: 9000, Part 5, 7, 8, VDE / VDI 3540
Front frames for indicating measuring instruments Principle dimensions	: DIN 43718
UL Combustibility Class	: UL 94 V-0
Technical conditions of delivery for electrical instruments	: DIN 43701
Mechanical strength (Free fall test, vibration test)	: IS 1248 / IEC 51 IS 9000 VDE 0411, part 1, Sec. 43/44, IEC 1010
E M C compliance as per following standards: EN 50081-2, EN 50082-2, EN 55011/CISPR 11, EN 60555-2, IEC 555-2 EN 61000-4-4/IEC 1000-4-4, EN 61000-4-2/IEC 1000-4-2, EN 61000-4-5/IEC 1000-4-5, ENV 50140. comply with following european directives: 89/336/EEC (EMC directive), 73/23/EEC (low voltage directive) & amendment 93/68/EEC, for CE marking.	

Options

Case	
Front facia	: Antiglare glass
Colour of bezel	: Red, Yellow, Blue, White.
Red index pointer	: Front adjustable on site
Position of use	: on request 0....180°
Dial	
Blank dial	: With initial and end values marked.
Special markings	: Numbering / Lettering.
Division dials	: Basic divisions without numbering.
Colour markings/bands	: Red or green

Safety Terminal Protection


Full sized polycarbonate back cover to provide protection against accidental contact (hand and fingers) acc.to IS 9249, VDE 0410.

Safety Precautions


- Instruments with damaged bezels or window glasses must be disconnected from mains.
- Adequate safety clearance must be maintained to control panel fasteners and to sheet metal housing, if non - insulated connector wires are used.
- The back cover must be snapped into place after the connector wires have been clamped for protection against accidental contact.

- Scales should be replaced under Voltage- free conditions.
- Bezels and window glasses should be replaced under Voltage - free conditions.

Connections

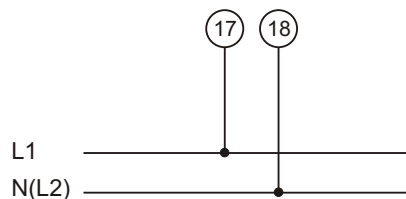

Dimensions



Dimensions (in mm)	ZQ48	ZQ72	ZQ96	ZQ144
Bezel	a □ 48	□ 72	□ 96	□ 144
Case	b □ 43.5	□ 66	□ 90	□ 136
Depth	c* □ 53	□ 53	□ 53	□ 53
	d □ 44.5	□ 67.5	□ 91.5	□ 137.5
	e 5.5	5.5	5.5	5.5
Cutout Size	□ 45 ^{+0.6}	□ 68 ^{+0.7}	□ 92 ^{+0.8}	□ 138 ⁺¹
Depth with Back cover	f ** 64	64	64	64
Weight (approx.)	0.15 kg.	0.21 kg.	0.28 kg.	0.49 kg.

Ordering Information

Type ZQ	Pointer type frequency meter
Front dimension 48 72 96 144	48 mm x 48 mm 72 mm x 72 mm 96 mm x 96 mm 144 mm x 144 mm
Measuring Ranges	Refer to table inside
Terminal protection	Full sized polycarbonate back cover
Front facia	Normal glass ^{*1} Antiglare glass ^{*3}
Colour of bezel	Black ^{*1} Red,Blue,Yellow,White ^{*3}
Position of use	Vertical ^{*1} On request 0 180 ^o ^{*3}
Dial	Standard scale same as measuring range ^{*1} Blank dial with division ^{*3} Additional lettering on request ^{*3} Additional numbering on request ^{*3} Coloured marking red or green ^{*3} Coloured sector red or green ^{*3}
Logo	RISHABH ^{*1} , for Indian sales C.G. ^{*1} , for export through Crompton Greaves I.D. Others ^{*3}

*1 standard

*3 Please clearly add the desired specifications while ordering

Ordering example

ZQ 72 Measuring range 45....50....55 Hz, rated voltage AC 230V

Specifications are subject to change without notice(11/11)



RISHABH
INSTRUMENTS

Measure, Control & Record with a Difference

RISHABH
INSTRUMENTS

RISHABH INSTRUMENTS PVT.LTD.

F-31, MIDC, Satpur, Nashik-422 007, India.

Tel.: +91 253 2202160, 2202202 Fax : +91 253 2351064

E-mail : India :- marketing@rishabh.co.in

International :- exp.marketing@rishabh.co.in

www.rishabh.co.in